


FP 55 B (NI) 4S

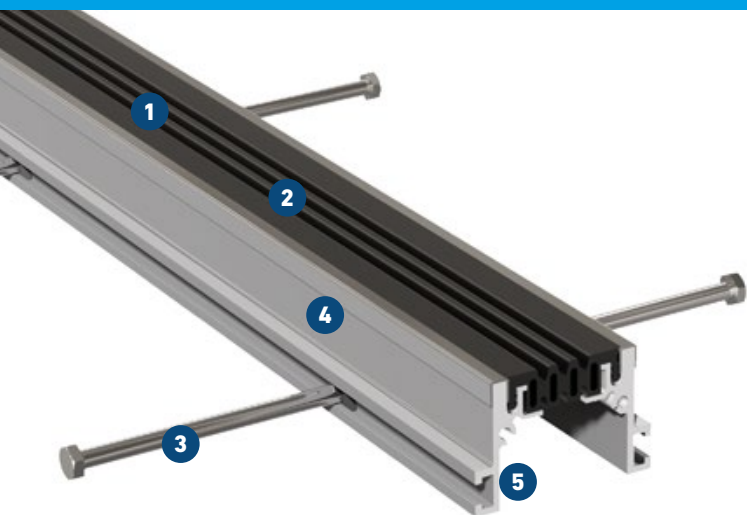

FOR FLUSH INSTALLATION IN CONCRETE FLOORS
VARIANTE MIT ABDECKKAPPEN AUS EDELSTAHL

MIGUTEC

JOINT COVERS FOR EXPANSION JOINTS



- 1 Flexible high quality elastomeric insert**
Hard wearing, temperature resistant (-30°C to +120°C), replaceable
- 2 Designed for where additional layers of concrete are being cast to strengthen existing slabs**
Slideable anchor rods for adjustable welding to the reinforcement
- 3 Multi directional movement**
- 4 High load capacity due to sturdy construction**
Solid aluminium brackets, also available with stainless steel covers
- 5 Quick and easy installation**
Positive connection of production lengths by means of connection pieces

Expansion joint cover	Joint width	Total movement	Visible width	Total width	Joint height	Load bearing capacity  [kN]	Load bearing capacity*  [kN]
	$b_f \text{ max}$ [mm]	Δb_f [mm]	b_s [mm]	b_t [mm]	h [mm]		
FP 55 B 4S	57	22 (± 11)	63	314	43	30	300
FP 55 B NI 4S	57	22 (± 11)	63	314	43	30	300

* no continuous use

Production length: 4 m

Visible surface also available in stainless steel. Version FP 55 B NI 4S.

Standard colours: black, grey

Wall connections: E1, E3, E4

